


YT4L-BS

Specifications


Model NO.		YT4L-BS
Same DimensionsAs YUASA Model		YTX4L-BS
Nominal Voltage		12V
Rated Capacity(10 hours rate)		3 AH
Dimension	Length	114 mm (4.49 inches)
	Width	70 mm (2.76 inches)
	Height	85 mm (3.35 inches)
	Total Height	85 mm (3.35 inches)
Approx. Weight W/O . ACID		1.11 kg (2.45 Lbs)
Approx. ACID Per Battery		0.19 L
Charge Current (A)		0.3 A

Characteristics

Capacity 25°C(77°F)	10hours rate (0.3 A to 10.5V)	3.0 Ah
	5hours rate (0.6 A to 10.2V)	2.55 Ah
	1C (3.0 A to 9.6V)	1.35 Ah
	3C (9.0 A to 9.6V)	1.08 Ah
Cold Cranking Amperes(-18°C SAE Standard)		40 A
Cold Cranking Amperes(-18°C EN Standard)		60 A
Internal Resistance(at 1KHz)		Appox.7.0m Ω
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	

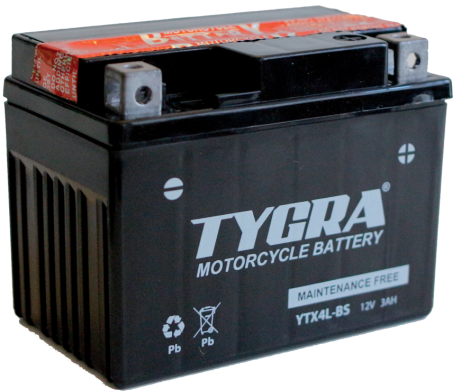

Dimensions

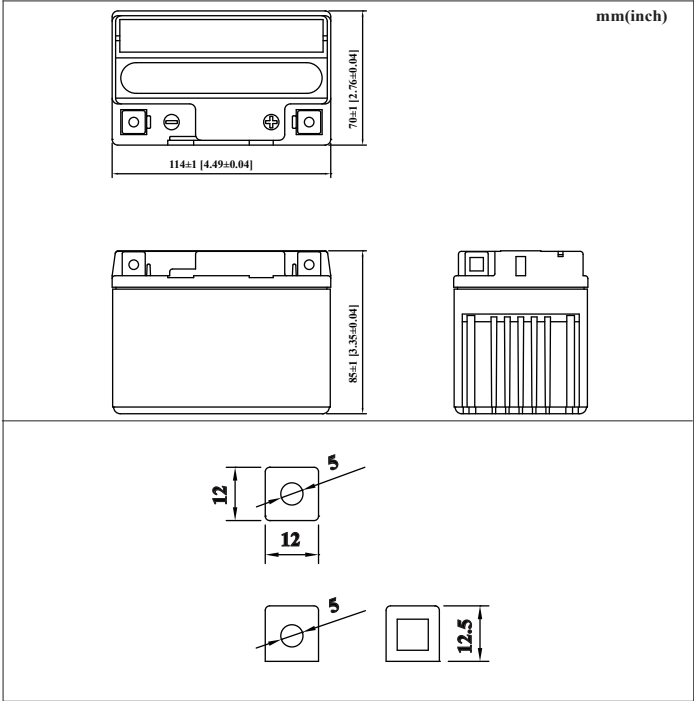

(V)
FOR 12V
BATTERY

Discharge Time VS. Discharge Current(25°C)

